

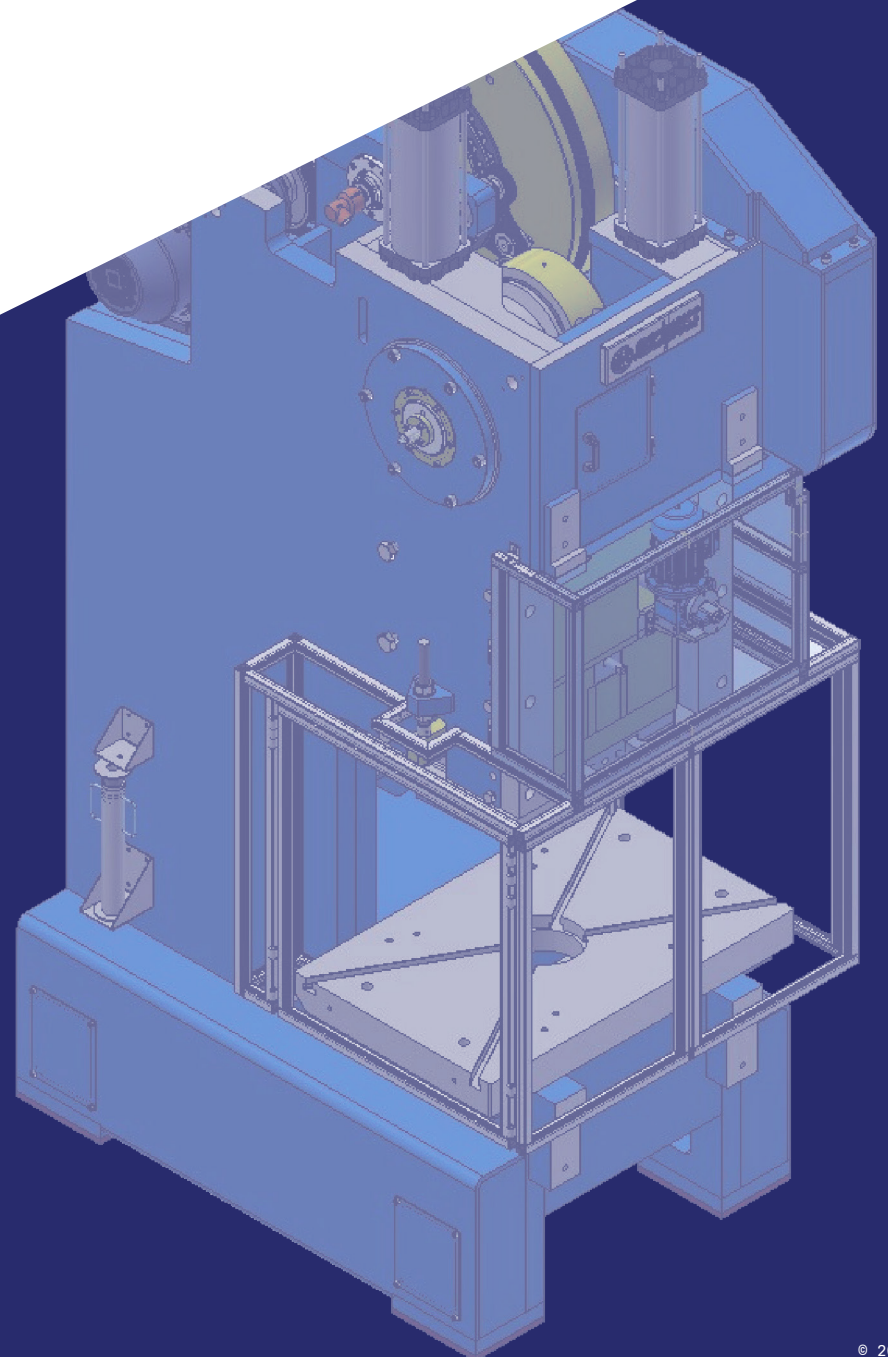


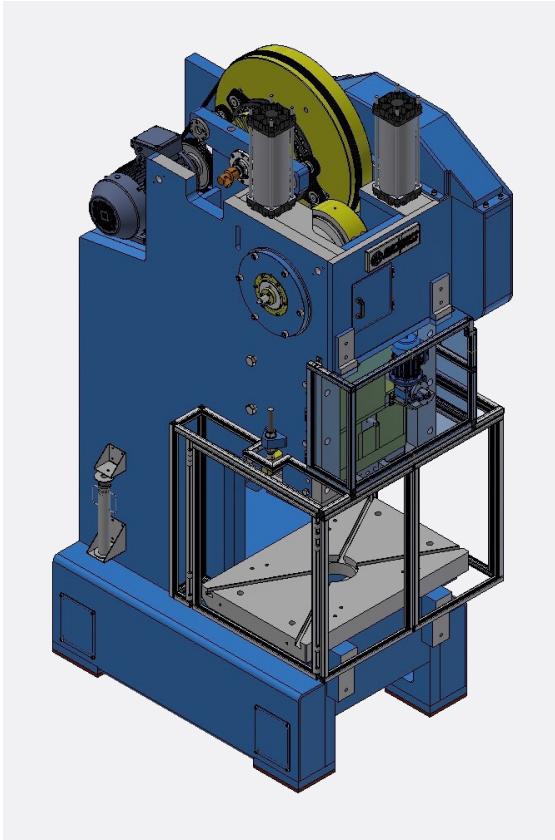

SERIE C

High-performance C-frame presses, engineered for heavy-duty applications. Generously sized structures and drive components, combined with efficient and safe systems, easy integration of automation, and a wide selection of optional accessories, make this series ideal for heavy-duty use in line with the demands of modern production.

Clutch and brake unit

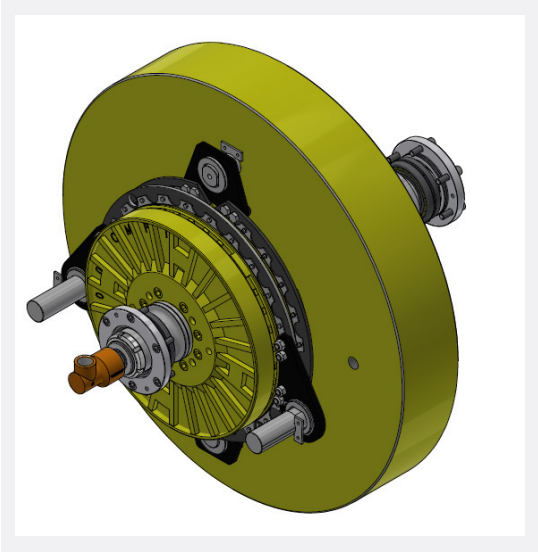

Standard table, every specification can be tailored to the customer's requirements:

SIZE		C63	C100	C160	C200	C215	C315
Capacity	Ton	63	100	160	200	250	315
Bolster area	mm	900 x 550	1000 x 640	1100 x 710	1400 x 860	1500 x 870	1500 x 870
Slide area	mm	590 x 425	700 x 460	770 x 540	950 x 740	1100 x 785	1100 x 785
Stroke	mm	145	170	200	200	200	200
Strokes per minute (continuous)	cicli/1'	63	63	45	40	40	25
Variable speed	cicli/1'	35 ÷ 105	30 ÷ 90	25 ÷ 75	20 ÷ 60	25 ÷ 50	20 ÷ 40
Rated work	kgm/ciclo	550	1000	1660	2240	2750	3550
Depth of throat	mm	280	320	355	400	400	400
Max. height bolster to slide	mm	500	560	630	670	700	750
Slide adjustment	mm	80	80	100	100	100	125
Additional bolster thickness	mm	75	80	80	90	90	90
Width between uprights	mm	370	430	500	650	720	720
Cushion capacity	Ton	5,3	7	10	15	24	32
Cushion stroke	mm	70	80	95	120	120	120
Cushion area	mm	350 x 350	400 x 400	470 x 470	630 x 630	680 x 630	680 x 630
Main motor power	kW	4	7,5	11	15	18,5	18,5
Approximate weight	kg	5500	8000	12.000	16.000	22.000	27.000

MECHPRESS SRL VIA TIBERIO
BIANCHI 2, 20863 CONCOREZZO
(MB) ITALY

TEL: +39 039 2914037
EMAIL: INFO@MECHPRESS.IT
WEBSITE: WWW.MECHPRESS.IT